

REX-P250



General Description

The REX-P250 is a high performance ramp/soak controller that can store up to 256 segments in 16 patterns. Each pattern consists of up to 16 segments, and patterns can be linked.

The REX-P250 has multi memory area functions to provide ideal control for wide variety of applications. Up to 8 PID memory areas and 8 alarm memory areas can be stored so that most suitable PID parameters and alarm settings can be used for each segment.

Total 15 keys and electronic clicking sound realize easy operation.

The REX-P250 has many standard functions such as 4-point time signal outputs (16 times ON/OFF per pattern), pattern end output, and digital inputs for mode change among reset, run and hold.

In addition, Position proportional control, digital communication, retransmission, up to two alarms, and heater break alarm are available as option.

Features

- ☆ Multi memory area
- ☆ Up to 256 segments (maximum 16 patterns)
- ☆ Time signal outputs, digital inputs, alarms
- ☆ Autotuning learning function
- ☆ Unique touch panel
- ☆ Position proportional control
- ☆ Ramp/soak, Fixed, Manual control mode
- ☆ Digital communications

Multi memory area


The REX-P250 allows you to use the most suitable PID memory area and the alarm memory area for each segment. The PID memory area and the alarm memory area are independent.

8 PID memory areas

Each memory area can store PID parameters, output limit high, output limit low, deadband for position proportional control, and differential gap for ON/OFF control.

8 alarm memory areas

Each memory area can store ALM1 and ALM2 set values, and the set value of heater break alarm.

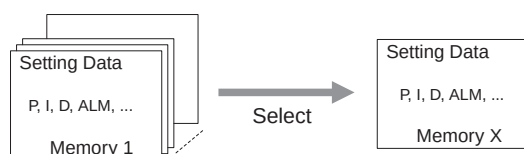


Three control modes

REX-P250 has three control modes as standard.

1. Ramp/soak control mode
2. Fixed setpoint control mode
3. Manual control mode


At-a-glance monitoring

The program pattern number and segment under execution can be monitored at a glance using exclusive LEDs. The program's progress can be more easily followed if a program pattern card is used. This allows the engineer to actually draw the time and temperature profile and see where the LEDs traverse along the program in real-time.

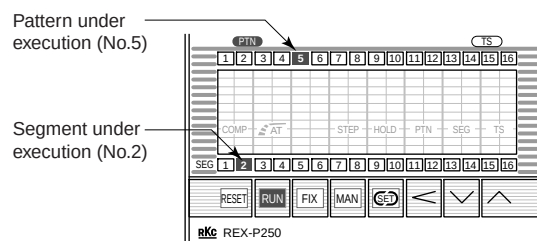

Autotuning learning function

Obtained PID values may not be ideal for all set points within a given program. The use of the AT learning function allows a maximum of eight optimum PID values to be obtained automatically for use in the program at various segment levels.

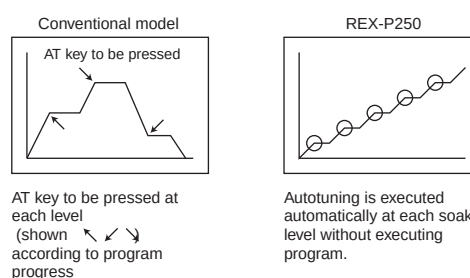


Ramp/Soak temperature controller REX-P250



Features


16 segments • 16 patterns

Maximum of 16 segments per pattern can be memorized, and maximum of 16 patterns can be memorized. Each pattern can be linked together (Pattern link function) so that a program containing up to 256 segments is possible.

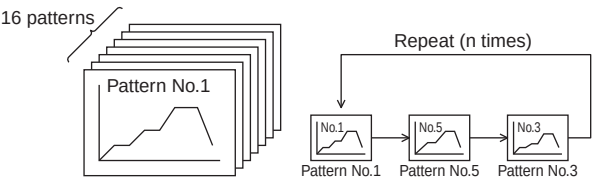


Time signal output

On Time and Off Time can be set for each time signal output setting so that time signal output can be used for auxiliary heater/cooler control and input signals to PLCs. Up to 16 settings per pattern are available.

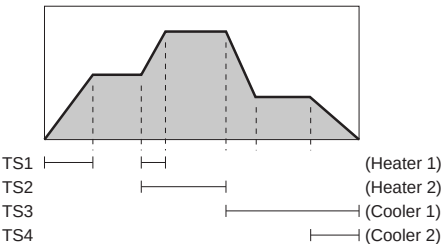


Digital input

Control status can be changed among Reset, Run, Step, Hold by digital inputs. Pattern number also can be set by optional digital inputs.

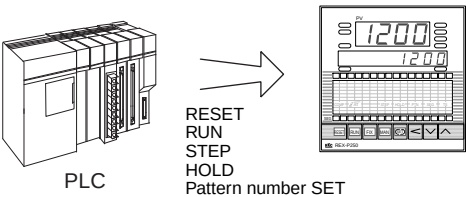


Analog output (Optional)

Analog output is available for recorder or data - logging equipment, etc. Either of the process value (PV), set value (SV), manipulation value (MV) can be output as DC voltage or current.

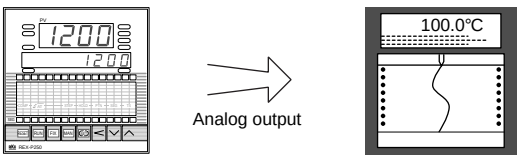


Digital communications (Optional)

The REX-P250 offers an optional communications interface (RS-232C or RS-422A) for networking to computers, PLCs and SCADA software in your plant. Up to 31 units can be interfaced on one RS-422A communication line.

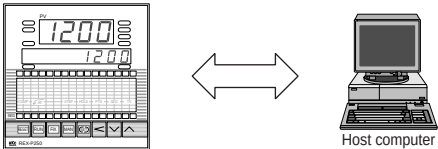


PV start

If a PV (measured value) is at a certain level when program control is started, the program start level can be specified to the present PV level.



Driving control motor


The REX-P250 provides ideal control for control motor by position proportional PID.

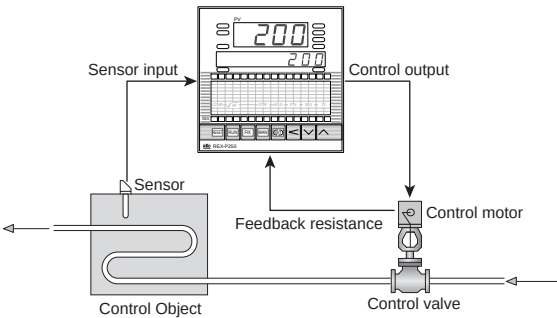

Heater break alarm (HBA) (Optional)

The HBA function monitors the load via an external current transformer*1 and detects failures in the control circuit such as heater breaks and the failure of a mechanical or solid state relay. When the control output is on and the load current drops below the HBA set value, the heater break alarm is activated. Conversely, when the control output is off and the load current still exists, the heater break alarm is turned on.

HBA for three phase is available. Please contact RKC for details.
*1 Current transformer: CTL-6-P-N (0 to 30A), CTL-12-S56-10L-N (0 to 100A)

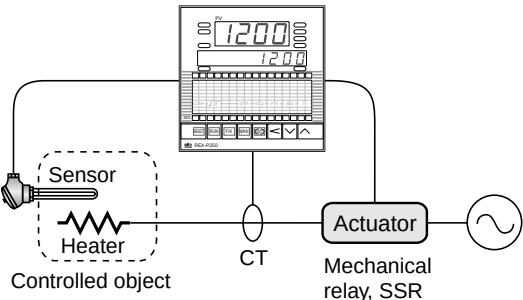

Ramp/Soak temperature controller REX-P250



Specifications

Input

Input

- a) Thermocouple : K, J, R, S, B, E, T, N (JIS/IEC), PLII (NBS)
W5Re/W26Re (ASTM), L (DIN)
Influence of external resistance : Approx. $0.35\mu\text{V}/\Omega$
Input break action : Up-scale
- b) RTD : Pt100 (JIS/IEC), JPt100 (JIS)
Influence of input lead resistance : Approx. 10Ω or less
Input break action : Up-scale
- c) DC voltage input : 0 to 10mV, 0 to 100mV, 0 to 1V, 0 to 5V, 1 to 5V, 0 to 10V
Input break action : Uncertain (Down-scale for 1 to 5V DC)
- d) DC current input : 0 to 20mA, 4 to 20mA
Input break action : Uncertain (Down-scale for 4 to 20mA)

Sampling time

0.5 sec

PV bias

-Span to +Span (However, between -1999 and 9999)

Performance

Measuring accuracy

Thermocouple

- $\pm(0.3\%$ of reading + 1 digit) or $\pm 2^\circ\text{C}$ (4°F), whichever is larger
• R, S and B input accuracy is not guaranteed between 0 and 399°C (0 and 750°F)

RTD

- $\pm(0.3\%$ of reading + 1 digit) or $\pm 0.8^\circ\text{C}$ (1.6°F), whichever is larger

DC voltage, DC current

- $\pm(0.2\%$ of reading + 1 digit)

Segment time accuracy

- $\pm(0.01\%$ of set value) or $\pm 50\text{msec}$, whichever is larger

Insulation resistance

- More than $20\text{M}\Omega$ (500V DC) between measured and ground terminals
More than $20\text{M}\Omega$ (500V DC) between power and ground terminals

Dielectric strength

- 1000V AC for one minute between measured and ground terminals
1500V AC for one minute between power and ground terminals

Program

Storage Program Pattern : Max. 16 patterns (16 segments per pattern)

Storage Segments : Max. 256 segments
(Possible to link, 16 segments x 16 patterns)

Program Repeat : 1 - 999 times or continuous

Level Setting : See input range

Time Setting : 00 hr 00 min 00 sec to 99 hrs 59 min 59 sec

PID Constant Section : Selectable from 8 patterns for each segment

Start Mode : Zero start or PV start (selectable)

Wait zone : Up, down 0 to 99°C ($^\circ\text{F}$) or 0.0 to 9.9°C ($^\circ\text{F}$)

Control

Control method

- a) ON/OFF control
b) PID control
c) PID control with autotuning
d) Position proportioning control

Memory area (PID constant section, etc..) : 8 areas

Major setting range

- Setting range : Same as input range.
Proportional band : 0.1 to 999.9% of span (ON/OFF action when $P=0$)
Integral time : 1 to 3600sec.(P + D action when $I=0$)
Derivative time : 1 to 3600sec.(P + I action when $D=0$)
Differential gap : 0 to 100°C ($^\circ\text{F}$) or 0.0 to 100.0°C ($^\circ\text{F}$)
(When used with ON/OFF action)
Output limiter high : -5.0 to +105.0%
Output limiter low : -5.0 to +105.0%

Control output

- Relay output : Form C contact, 250V AC 3A (resistive load)
Voltage pulse output : 0/12V DC
(Load resistance : More than 800Ω)
Current output : 0 to 20mA or 4 to 20mA DC
(Load resistance : Less than 600Ω)
Continuous voltage output : 0 to 5V, 0 to 10V, 1 to 5V DC
(Load resistance : More than $1\text{k}\Omega$)
Triac trigger output : Trigger method, Zero-cross method
(resistive load) (100A or less)

Motor valve control (Position proportioning type only)

- Input resistance (Feedback resistance) : 135Ω as standard.
POS sampling time : 1 sec.
Neutral band : 0.1 to 20.0% of proportional band
Output : Relay output, 250V AC 3A (resistive load)
Form A contact for OPEN and CLOSE.
Motor rotating speed : Suitable for 20 to 240 sec. (Full open to full close)

Standard function

Time signal

- Setting time : 00 hr 00 min 00 sec to 99 hrs 59 min 59 sec.
Storage pattern : 16 patterns (16 times ON/OFF per pattern)
Output : 4 points, open collector output, 24V DC 50mA

Pattern End Output

- Setting time : 00 hr 00 min 00 sec to 99 hrs 59 min 59 sec.
Output : 1 point, open collector output, 24V DC 50mA

External Control

- Start pattern No. setting (4-bit binary contact), RESET, RUN, HOLD, STEP

Alarm

(Optional)

Temperature alarm

- a) Number of alarm : 2 points
b) Alarm action : Deviation high, low, high/low, band, and process high, low alarms
c) Alarm differential gap : 0 to 100°C ($^\circ\text{F}$)(%) or 0.0 to 100.0°C ($^\circ\text{F}$)(%)

Heater break alarm (For single phase)

- Setting : 0.0 to 100.0A
CT type : CTL-6-P-N (30A)
CTL-12-S56-10L-N (100A)

- When heater break alarm (HBA) function is used, alarm 2 is not available.
- When control output type is current output or continuous voltage, heater break alarm is not available.

Alarm output

- Relay output, Form A contact 250V AC 1A (resistive load)

Options

Retransmission output

- Number of outputs : 1 point
Output signal : 0 to 10mV, 0 to 100mV DC
(Load resistance : More than $20\text{k}\Omega$)
0 to 1V, 0 to 5V, 0 to 10V, 1 to 5V DC
(Load resistance : More than $1\text{k}\Omega$)
0 to 20mA, 4 to 20mA DC
(Load resistance : Less than 600Ω)
Output type : Measured value (PV), Set value (SV), Manipulated output (MV)

Digital communications

- a) Communication method : RS-422A (2-wire), RS-232C
b) Communication speed : 600, 1200, 2400, 4800, 9600 bps
c) Bit format
Start bit : 1
Data bit : 7 or 8
Parity bit : Without, even or odd
Stop bit : 1 or 2
d) Communication code : ASCII(JIS) 7-bit code

Ramp/Soak temperature controller REX-P250

General specifications

External Dimensions (W x H x D)

96 x 96 x 150mm

Self-diagnostic function

Setting input data check, RAM check, CPU power check and watchdog timer.

Fail output : 1 point relay contact output 250V DC 0.1A (Resistive load)
OPEN when fail is detected.

Supply voltage

90 to 264V AC (Including supply voltage variation)

[Rating : 100 to 240V AC] (50/60Hz common)

Power consumption

Less than 15VA (100 to 240V AC)

Effect by power failure

A power failure of 50ms or less will not affect the control action.

If a power failure more than 50 ms and less than 4 sec occurs, controller will take HOT start as restart conditions.

Restart conditions for a power failure more than 4 sec can be selected between HOT or COLD start.

Operating environments : 0 to 50°C [32 to 122°F] , 45 to 85% RH

Memory backup : RAM back-up by lithium battery

Net weight

Approx. 750g

CVM-4 output converter (Optional)

CVM-4 converts the output types of **4-point** time signal output and a pattern end output from open collector to relay output.

Input

Open collector output from REX-P250 (parallel signal)

Output

Time signal output 4 points

Pattern end output 1 point

Relay output, Form A contact 250V AC 2A (resistive load)

Cable length

2 meters (The cable shall be prepared separately.)

Supply voltage

100/110V, 120V, 200/220V, 240V AC $\pm 10\%$ (50/60Hz)

•Please specify when ordering.

Power consumption

Less than 6VA

Operating environments

0 to 50°C [32 to 122°F] , 45 to 85% RH

Net weight

Approx. 1.5kg

External dimensions (W x H x D)

67 x 137 x 184mm

SP-1 selector (Optional)

SP-1-16Y is a pattern number selector which can be connected to REX-P250.

Setting

Digital switch (2-button type), Push switch (Non-lock type)

Setting range

1 to 16

Performance

Contact resistance : Less than 200m Ω

Operating environments

-10 to 50°C [14 to 122°F] (No dew condensation)

Net weight

Approx. 110g

External dimensions (W x H x D)

48 x 48 x 100mm

Ramp/Soak temperature controller REX-P250



Model and Suffix Code

Specifications	Model and Suffix Code											
Model	REX-P250 ☐ ☐ ☐ - ☐ * ☐ - ☐ ☐ - ☐											
Control method	PID control PID control with AT Position proportional PID	H F Y										
Alarm	No alarm One alarm Two alarm	N S D										
Input type	Thermocouple RTD DC mA, mV, V (Code number 1-8)	C R ☐										
Control output	Relay output Voltage pulse DC current (See output table) DC voltage (See output table) Triac trigger	M V R E G										
Case color	Black							B				
Heater break alarm (HBA)	Not supplied 1-phase heater break alarm							N 2				
Analog output	Not supplied DC mA, mV, V (Code number 1-8)								N ☐			
Digital communications	Not supplied RS-232C RS-422A (4-wire system)									N 1 2		

■ For CE marked, UL approved and CSA certified products, please add the suffix of "/CE" to the end of the model code.

Alarm action type (Please specify alarm type when ordering.)

Deviation High	Deviation Low	Deviation High/Low
Band Alarm	Deviation High with alarm hold	Deviation Low with alarm hold
Deviation High/Low with alarm hold	Band Alarm with alarm hold	Process High
Process Low	Process High with alarm hold	Process Low with alarm hold

• When two alarms are selected, heater break alarm is not available.

Range and input table (Please specify a input type and range when ordering.)

Thermocouple

Input	Range
K	0 — 200°C
	0 — 400°C
	0 — 600°C
	0 — 800°C
	0 — 1000°C
	0 — 1200°C
	0 — 1372°C
	-100.0 — 400.0°C
	0 — 800°F
	0 — 1600°F
J	0 — 2502°F
	-100.0 — 750.0°F
	0 — 200°C
	0 — 400°C
	0 — 600°C
	0 — 800°C
	0 — 1000°C
	0 — 1200°C
	-100.0 — 400.0°C
	0 — 800°F
	0 — 1600°F
	0 — 2192°F
	-100.0 — 750.0°F

Input	Range
R	0 — 1600°C
	0 — 1769°C
	0 — 3200°F
	0 — 3216°F
	0 — 1600°C
S	0 — 1769°C
	0 — 3200°F
	0 — 3216°F
	400 — 1800°C
	0 — 1820°C
B	750 — 3200°F
	0 — 3308°F
	0 — 800°C
	0 — 1000°C
	-100.0 — 300.0°C
E	0 — 1600°F
	0 — 1832°F
	-100.0 — 500.0°F

Input	Range
T	0 — 400°C
	0 — 752°F
	-199.9 — 400.0°C
	-199.9 — 100.0°C
	-100.0 — 200.0°C
	0.0 — 350.0°C
	-199.9 — 752.0°F
	-100.0 — 200.0°F
	-100.0 — 400.0°F
	0.0 — 450.0°F
N	0.0 — 752.0°F
	0 — 1200°C
	0 — 1300°C
	0 — 2300°F
	0 — 2372°F
	0 — 2000°C
	0 — 2320°C
	0 — 4000°F
	0 — 1300°C
	0 — 2300°F
PLII	0 — 400°C
	0 — 800°C
	0 — 800°F
	0 — 1600°F
	0 — 1600°F

RTD

Input	Range
Pt100 JPt100	-199.9 — 649.0°C
	-199.9 — 200.0°C
	-100.0 — 50.0°C
	-100.0 — 100.0°C
	-100.0 — 200.0°C
	0.0 — 50.0°C
	0.0 — 100.0°C
	0.0 — 200.0°C
	0.0 — 300.0°C
	0.0 — 500.0°C
	-199.9 — 999.9°F
	-199.9 — 400.0°F
	-199.9 — 200.0°F
	-100.0 — 100.0°F
	-100.0 — 300.0°F
	0.0 — 100.0°F
	0.0 — 200.0°F
	0.0 — 400.0°F
	0.0 — 500.0°F
	0.0 — 500.0°F

Signal code

1	0 - 10mV DC	2	0 - 100mV DC	3	0 - 1V DC	4	0 - 5V DC
5	0 - 10V DC	6	1 - 5V DC	7	0 - 20mA DC	8	4 - 20mA DC

Output table

R	Current output	4 - 20mA DC	0 - 20mA DC	
E	Continuous voltage output	0 - 5V DC	0 - 10V DC	1 - 5V DC



Model and Suffix Code

CVM-4 output converter

CVM-4 converts the output types of **4-point** time signal output and a pattern end output from open collector to relay output.

Specifications	Model and Suffix Code		
Model	CVM-4	— 2	☐
Contact output	With contact output (Without FAIL output)	2	
Supply voltage	100 / 110V AC		1
	120V AC		2
	200 / 220V AC		3
	240V AC		4
	Other		9

•The cable shall be prepared separately.

SP-1 pattern No. selector



The SP-1 is a pattern number selector for the REX-P300 in connection with the optional contact inputs for pattern set. It simplifies pattern selecting operation by plant floor personnel. On the SP1, as soon as P SET button is pressed after a pattern is selected between 1 and 16, the selected pattern will be set on the REX-P300.

Model Code : **SP-1-16Y** (Pattern setting button provided)
SP-1-16N (Pattern setting button not provided)

Ramp/Soak temperature controller REX-P250

External Dimensions and Rear Terminals

REX-P250

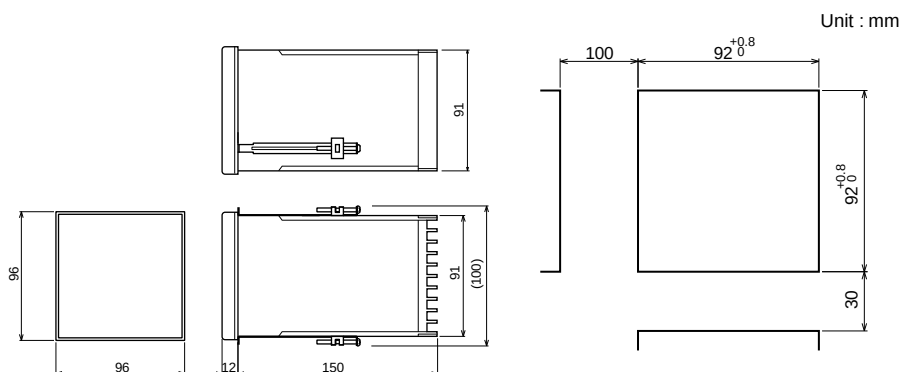



No.	Description
1	Ground
2	AC 100 to 240V
3	
4	COM
5	TS1
6	TS2
7	TS3
8	TS4
9	END
10	

No.	Description
30	Alarm output
31	FAIL
32	ALM1
33	ALM2 or HBA
34	
35	Control output (1) Relay contact output (2) Voltage DC/Current DC (3) Triac trigger output
36	OUT2
37	OUT1
38	ANALOG
39	


No.	Description
20	COM
21	PTN 1
22	PTN 2
23	PTN 4
24	PTN 8
25	P.SET
26	RESET
27	RUN
28	STEP
29	HOLD

No.	Description
11	SG (1) SG (2)
12	T/R(A) SD
13	T/R(B) RD
14	
15	CT
16	
17	O
18	W
19	C
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	

CVM-4



Mounting dimensions



No.	Description
1	G
2	100/110V or 200/220V AC
3	
4	
5	END
6	TS1
7	TS2
8	TS3
9	TS4
10	COM
11	
12	



No.	Description
13	END
14	
15	
16	
17	TS 1
18	TS 2
19	TS 3
20	TS 4
21	
22	
23	
24	





External Dimensions and Rear Terminals

SP-1-16

Unit : mm



Panel cutout



No.	Description	
6		P SET
1		COM
2		1
3		2
4		4
5		8
		Pattern set output
		Binary contact signal